

Concept to commissioning

Tacmin Madini is a registered distributor of enrichment and classification plants. We work in close association with Turkey based manufacturer CWP in the delivery of enrichment and classification plants from concept to commissioning, enabling us to offer our customers more than 20 years of experience in the design, manufacturing and construction of plants.

CWP has delivered a broad range of technology-based products and solutions since 1990 in more than 15 countries worldwide, and continues to do so.

As well as its manufacturing capabilities, CWP also provides complete plant process designs upon which the customers can procure the specified equipment at their own responsibility.

CWP's engineering capabilities and knowledge enable more competitive prices as CWP can provide its own in house designs for manufacturing and constructing on EPC basis. On the other hand, CWP can offer services for process correction and commissioning of false processed / designed plants.



Tacmin Madini, formerly known as Tacmin Group, has been solving complex openpit mining business challenges since 1996. We are an independent consulting group, consisting of a mixture of permanent specialists and independent associates that co-operate in the delivery of professional services covering mineral resource evaluation, planning, design, management, construction, operation, maintenance and rehabilitation of open-pit mines.

Registered distributor of CWP products**DE-KA MINING GELIK / ZONGULDAK (200 t/h)**

100 t/h Capacity, +20-150mm Coarse Coal Washing Plant
100 t/h Capacity, +0,5-20mm Dust Coal Washing Plant

MILTEN / ISTANBUL (150 t/h)

100 t/h Capacity +10-150 mm Coarse Coal Washing Plant
50 t/h Capacity +0,5-20 mm Fine Coal Washing Plant

UYAR MINING SOMA / MANISA (175 t/h) + (50 t/h)

100 t/h Capacity +20-150mm Coarse Coal Washing Plant
75 t/h Capacity +0,5-20 mm Fine Coal Washing Plant

50 t/h Capacity +0,5-20 mm Fine Coal Washing Plant

ESIN MINING / SOKE (75 t/h)

50 t/h Capacity +20-150 mm Coal Washing Plant
25 t/h Capacity +0,5-20 mm Coal Washing Plant

EGE UYARLAR MINING / SOKE (150 t/h)

100 t/h Capacity +18-150mm Coarse Coal Washing Plant
50 t/h Capacity +0,5-18mm Fine Coal Washing Plant

SULUOVA ESKICELTEK / AMASYA (175 t/h)

100 t/h Capacity, +18-150mm Coarse Coal Washing Plant
75 t/h Capacity, +0,5-20 mm Fine Coal Washing Plant

IMBAT MINING / SOMA (350 t/h)

200 t/h Capacity +10-250 mm, Coarse Coal Washing Plant
150 t/h Capacity +0,5-10 mm Fine Coal Washing Plant

GURMIN MINING / SOMA (100 t/h)

100 t/h Capacity +10-150mm Coarse Coal Washing Plant
CELIKLER INSAAT / CORUM (150t/h)+ (175 t/h)

100 t/h Capacity +6-150 mm Coarse Coal Washing Plant
50 t/h Capacity +0,5-10 mm Coarse Coal Washing Plant

100 t/h Capacity +20-150 mm Coarse Coal Washing Plant
75 t/h Capacity +0,5-20 mm Fine Coal Washing Plant

ZIRVE MINING / KILIMLI - ZONGULAK (175 t/h)

100 t/h Capacity, +18-150 mm Coarse Coal Washing Plant
75 t/h Capacity +0,5-18 mm Double Density Fine Coal Washing Plant

ZIRVE MINING / KILIMLI - ZONGULAK (10 t/h)

10 t/h Capacity, +0-0,15 mm Vacuum Filtration Plant for Sludge

KARTALKAYA MINING / AZDAVAY - KASTAMONU (118 t/h)

50 t/h Capacity, +18-150 mm Coarse Coal Washing Plant
50 t/h Capacity +0,5-18 mm Double Density Fine Coal Washing Plant

HEMA KANDILLI COAL MINING/ ZONGULDAK (150 t/h)

100 t/h Capacity, +10-150 mm Coarse Coal Washing Plant
50 t/h Capacity +0,5-10 mm Fine Coal Washing Plant

CEKTAS A.S.- CIFTAY A.S. / OREN-MILAS-MUGLA (800 t/h)

800 t/h Capacity, +0-400 mm Triage Coarse Coal Washing

Plant

<http://www.tacmingroup.com/enrichment-classification-mine-activities.html>

**Tacmin Madini – CWP Solutions****Plan extraction and beneficiate**

This turnkey service is unique to Tacmin Madini customers and consists of a combination of mineral resource extraction and EPCM contract for the classification and enrichment of extracted ore.

Head grade is consistently been achieved through a careful transparent planning and management of ore extraction process followed by the management of the crushing, screening and washing of the product.

This turnkey service ensures that the customers mining process (contractor or owner) is properly managed, monitored and optimised and dilution and contamination of ore is strictly controlled.

A turnkey planning and beneficiation contract consists of mining and beneficiation cost estimate, front-end engineering design, procurement, construction, provision of manpower, mineral resource extraction and management of crushing, screening and washing of product.


GRAVITY FEED SEPARATORS

MINING EQUIPMENT

PRODUCT# TM/GFS/27072011

CWP services can be cited as:

- EPC plant procurement
- Equipment manufacture on custom requirements
- Plant process design
- Correction of false process designs and commissioning these flawed plants.
- Improving existing process designs / plants

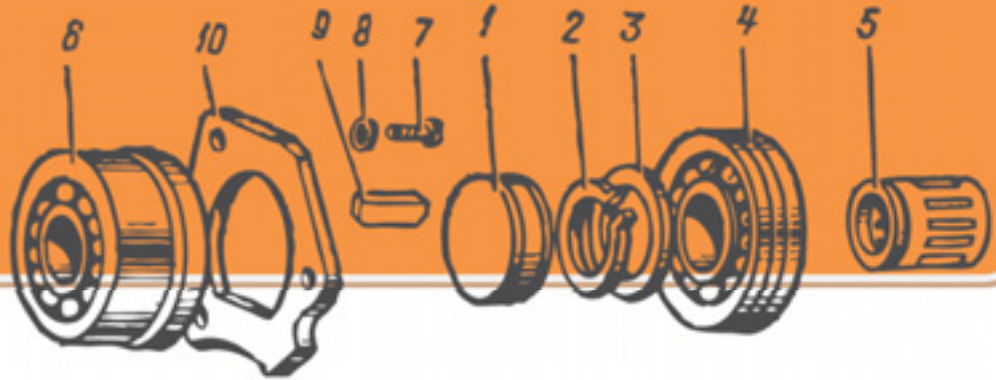

Gravity Feed Separators

CWP GFC Separators have been designed and manufactured according to the needs of customers.

They combine the minimum available machine sizes with maximum process capacity for space efficiency.

GFC separator is the cyclone system which was designed to provide high quality coal for coal power stations. It is an economic and simple solution. In comparison to the former classical coarse circuit, fine circuit heavy media plants, it is more advantageous, economic, with low operation cost, low capital cost and has high capacity.

CWP GFC Separators are designed not to be clogged by long reject cords through the application of conventional cyclonic shaped discard discharger. This prevents the malfunctions and subsequent production loss.

The gravity feeding to the GFC Separator enabled larger and constant feeding rates than pump feeding as pump feeding has a limited feeding rate. Constant feeding provides accurate separation. CWP GFC Separator is designed with a custom media feeding system which provides automatically adjustable heavy media feeding on the feed rate changes.

PRODUCT #TM/GFS/27072011

MECHANICAL PRODUCT SPECIFICATIONS SHEET

TECHNICAL SPECIFICATIONS

| | |
|-----------------------|---|
| Maximum Capacity: | 500 TPH |
| Maximum Feeding Size: | 100 mm - 120 mm |
| Diameter: | 700 mm up to 1500 mm. |
| Construction | Ceramic lined steel body or Ni-Hard 4 cast body |

Features:

- Low installation cost
- Low cost and easy operation
- Low magnetite loss
- Small space requirement
- Low mechanical cost as it is not a moving equipment with low abrasion.



Tacmin Madini is a registered distributor of CWP Plants

